

INEO

INEOLINK concealed cistern for wall-hung WC, for accessible installations, rim height +50 mm

KEY FEATURES

• Pre-assembled LAUFEN INEOLINK installation element for wall-hung WC and shower WC. It is improved for a most easy and rapid single-person installation in dry-wall and pre-wall situations

• With a height adjustability system with friction-braked legs (0...200 mm) and with tool free depth-adjustment (135...205 mm). Foot can be rotated to fit common UW50 and UW75 profiles, as well as the LAUFEN INEOGRID system.

• It has tool-free fastening and cable connections for flush plates.The dual flush is preset to 6l/3l and can be adjusted down to 4l/2l. Flushing performance can be adjusted on the fly, without disassembly of the flush valve, to avoid over-splashing. All internal components can be replaced and maintained without the use of tools either

• INEOLINK are designed for perfect compatibility with the wide range of LAUFEN INEO Flush Plates and LAUFEN ceramic products including toilets, urinals, washbasins and bidets

• H9201170000001 can be used with WC bowls up to 700mm
H9201170000001 complies with EN 14055

#mountingAccessoriesExcluded_text

LAUFEN INEO Flush Plate with two-cable activation
LAUFEN INEO Flush Plate with sensor-motor activation
Optional:
H8926670000001 INEOLINK installation element for grip and restraint systems, left
H8926680000001INEOLINK installation element for grip and restraint systems, right
Sound absorber pads VS16032C000000 (to fulfil SIA 181 and others)
Spare parts and many more accessories available

© Copyright 2026, LAUFEN Bathrooms AG | https://www.cac.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

Average water consumption (L.) : 3.75
Dynamic pressure range : 0,5 - 10 Bar
Elbow connection : DN90 (110 mm)
Flushing volume preset : Dual flush 3/6 litres
Height Adjustable : 0 – 200 mm

Material : Plastic, Steel powder coated, Steel zinc plated
Maximum Temperature (°C) : 25
Minimum fixation depth (mm) : 135
Net weight (kg) : 14.26
Operating panel position : Frontal

Suitable for : Wall-hung WC
WC Fixation : 180 mm, 230 mm
Wall Fixation Adjustable : 135 – 205 mm
Water inlet position : Top



Adjustable flushing volume

Adjustable flushing volume: Dual flush 3/4,5 litres



Adjustable flushing volume


Adjustable flushing volume: Dual flush 4/2 litres




Adjustable flushing volume

Adjustable flushing volume: Dual flush 6/3 litres


TECHNICAL DRAWINGS

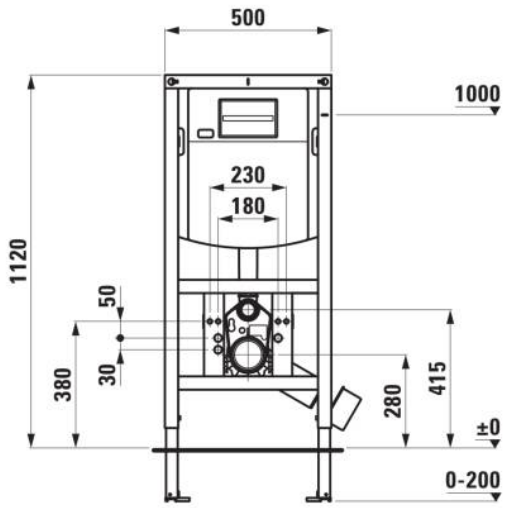

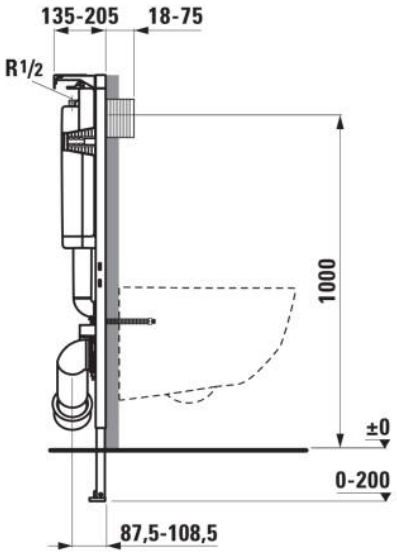

© Copyright 2026, LAUFEN Bathrooms AG | https://www.cac.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

water_label_text

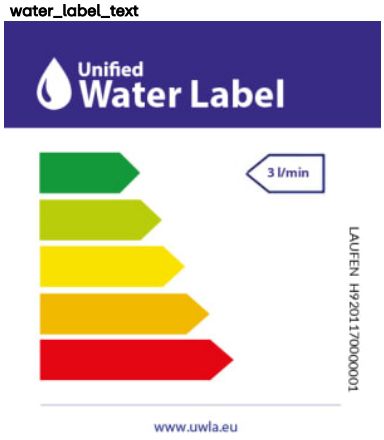


© Copyright 2026, LAUFEN Bathrooms AG | https://www.cac.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001

COMPATIBLE WITH



Wall-hung WC 'liberty', washdown, rimless, barrier-free

H821960...0001

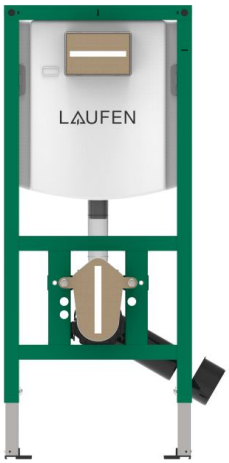

© Copyright 2026, LAUFEN Bathrooms AG | https://www.cac.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001



INEO

INEO, a proven and well established installation system “made in Germany”, puts LAUFEN’s premium quality and convenience behind the wall too. The system with its prefabricated parts offers clever solutions for fast and uncomplicated installation for new construction or refurbishment.

© Copyright 2026, LAUFEN Bathrooms AG | https://www.cac.laufen.com/products/ineolink-concealed-cistern-wall-hung-wc-accessible-installations-rim-height-50mm-H9201170000001?sku=H9201170000001